

G9LED



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21322 |
| Product | G9LED |
| Box quantity (pcs.) | 20/200 |
| EAN Box | 8012878213224 |
| Gross weight of box in kg | 4.05 |
| Weight of single lamp in kg | 0.01 |
| Length of box in m | 0.335 |
| Width of box in m | 0.162 |
| Height of box in m | 0.329 |
| ETIM class name | LED lamp |
| Beam angle | 320° |
| Brand of LED | EPISTAR |
| Power Factor | >0.4 |

Electrical Parameters

| | |
|-------------------------------|-------|
| Lamp nominal wattage | 4W |
| Rated wattage | 4 W |
| Nominal current (mA) | 20 mA |
| Energy Consumption kWh/ 1000h | 4 |


Light Application Parameters

| | |
|---------------------------------|--------------|
| Luminous flux | 330 lm |
| Luminous efficiency of lamp | 82.50 lm/W |
| Colour temperature | 3000 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.60(35000h) |
| SDCM | 4.1 |
| Imax(cd) | 49.3 |
| Switching cycles | 20000 |

Specification

| | |
|-----------------------|---------|
| dimmable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | G9 |
| Lamp shape | G9 |

Colour Temperature consistency
(SDCM according to Mac Adam's ellipse)

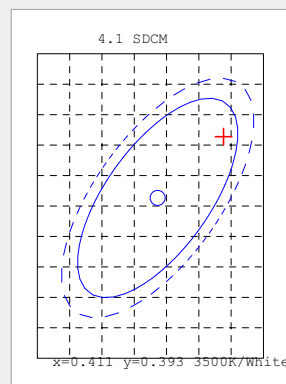

Peak of light intensity (max. cd)

