

GOCCIALED STD HIGH EFFICIENCY



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21337 |
| Product | GOCCIALED STD |
| Box quantity (pcs.) | 10/50 |
| EAN Box | 8012878213378 |
| Gross weight of box in kg | 9.2 |
| Weight of single lamp in kg | 0.12 |
| Length of box in m | 0.745 |
| Width of box in m | 0.365 |
| Height of box in m | 0.175 |
| ETIM class name | LED lamp |
| Beam angle | 220° |
| Brand of LED | EPISTAR |
| Power Factor | >0.5 |
| Voltage | 220-240 |

Electrical Parameters

| | |
|------------------------------|--------|
| Lamp nominal wattage | 12W |
| Rated wattage | 12.0 W |
| Nominal current (mA) | 130 mA |
| Energy Consumption kWh/1000h | 12 |


Light Application Parameters

| | |
|---------------------------------|---------------|
| Luminous flux | 1400 lm |
| Luminous efficiency of lamp | 100 lm/W |
| Colour temperature | 4000 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.88 (15000h) |
| SDCM | 3.5 |
| Imax(cd) | 284.6 |
| Switching cycles | 20000 |

Specification

| | |
|-----------------------|---------|
| dimmbable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | E27 |
| Lamp shape | A65 |

Colour Temperature consistency
(SDCM according to Mac Adam's ellipse)

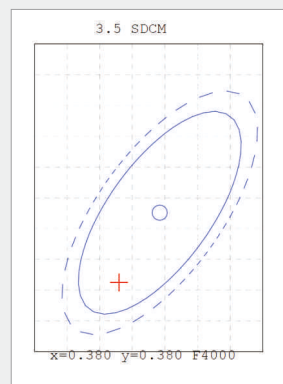

Peak of light intensity (max. cd)

