




APPENDIX 2019  
LED LIGHTING  
SOLUTION

APPENDIX 2019  
LED LIGHTING  
SOLUTION



parete  
**PLAFONE**

# PLAFOLED T.




Apparecchio da soffitto LED integrato  
Corpo in metallo verniciato  
Diffusore in MS  
Driver incluso

Ceiling fitting  
Painted metal body  
MS diffuser  
Driver included



CODICE/CODE	41006	41007	41008	41009	41010	41011
<b>BEAM</b>	130°	130°	120°	120°	120°	120°
<b>COLORE/COLOUR</b>	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white
<b>COLORE/COLOUR T</b>	3000K	4000K	3000K	4000K	3000K	4000K
<b>LUMEN</b>	1820	1900	2430	2500	3180	3190
<b>CRI</b>	>80	>80	>80	>80	>80	>80
<b>LED</b>	NationStar	NationStar	NationStar	NationStar	NationStar	NationStar
<b>WATT</b>	24W	24W	32W	32W	42W	42W
<b>PF</b>	0,5	0,5	0,9	0,9	0,9	0,9
<b>SUPPLY</b>	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz
<b>DRIVER</b>	210mA/115-200V	210mA/115-200V	80mA/432-500V	80mA/432-500V	370mA/115-160V	370mA/115-160V
<b>KG</b>	0.6KG	0.6KG	0.7KG	0.7KG	1KG	1KG
<b>PCS</b>	10	10	10	10	10	10
<b>DIMENSIONI/DIMENSIONS</b>						
<b>a</b>	Ø340	Ø340	Ø390	Ø390	Ø480	Ø480
<b>b</b>	65	65	65	65	78	78



Apparecchio da soffitto LED integrato  
Corpo in metallo verniciato  
Diffusore in MS  
Driver incluso

Ceiling fitting  
Painted metal body  
MS diffuser  
Driver included




CODICE/CODE	41012	41013	41014	41015
<b>BEAM</b>	120°	120°	120°	120°
<b>COLORE/COLOUR</b>	bianco/white	bianco/white	bianco/white	bianco/white
<b>COLORE/COLOUR T</b>	3000K	4000K	3000K	4000K
<b>LUMEN</b>	2560	2660	3180	3300
<b>CRI</b>	>80	>80	>80	>80
<b>LED</b>	NationStar	NationStar	NationStar	NationStar
<b>WATT</b>	32W	32W	42W	42W
<b>PF</b>	0,9	0,9	0,9	0,9
<b>SUPPLY</b>	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz
<b>DRIVER</b>	80mA/432-500V	80mA/432-500V	370mA/115-160V	370mA/115-160V
<b>KG</b>	0.7KG	0.7KG	1KG	1KG
<b>PCS</b>	10	10	5	5
<b>DIMENSIONI/DIMENSIONS</b>				
<b>a</b>	330	330	430	430
<b>b</b>	65	65	65	65

# PLAFOLED Q.



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver

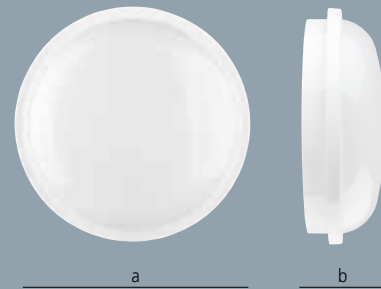


CODICE / CODE	40303	40304
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	4000K
LUMEN	1250	1650
CRI	>80	>80
LED	Epistar	Epistar
WATT	15W	20W
PF	>0,5	>0,5
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,25	0,40
PCS	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
a	167	221
b	62	72



Apparecchio LED integrato  
Corpo in TRP  
Schermo in PC opale  
Driver integrato

Built-in LED fitting  
TRP body  
Opal PC screen  
Built-in driver

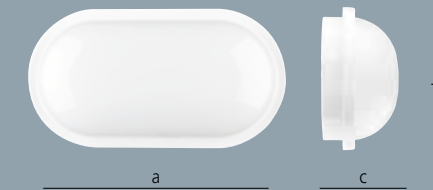

CODICE / CODE	40305	40306
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	4000K
LUMEN	1250	1650
CRI	>80	>80
LED	Epistar	Epistar
WATT	15W	20W
PF	>0,5	>0,5
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,29	0,42
PCS	20	20
<b>DIMENSIONI / DIMENSIONS</b>		
a	215	271
b	115	146
c	62	76

RICETTE

CONSIGLIO

INTEGRATORI

RI... NATURALI

Luigi da  
INCASSO



# LEDSPOT\_TRP1



Incasso LED integrato  
Corpo in TRP  
Diffusore in PC opale  
Driver integrato

Recessed fitting with built-in LED  
TRP body  
Opal PC diffuser  
Built-in driver



CODICE / CODE	40511	40512	40513	40514	40515	40516	40517	40518
COLORE / COLOUR	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white
COLORE LUCE / COLOR T	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LUMEN	825	888	1242	1320	2135	2332	2431	2487
CRI	>80	>80	>80	>80	>80	>80	>80	>80
LED	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar
WATT	10W	10W	15W	15W	25W	25W	30W	30W
PF	>0,5	>0,5	>0,5	>0,5	>0,5	>0,5	>0,9	>0,9
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
FORO / HOLE	Ø90	Ø90	Ø120	Ø120	Ø170	Ø170	Ø200	Ø200
KG	0,14	0,14	0,20	0,20	0,33	0,33	0,45	0,45
PCS	20	20	20	20	20	20	20	20
DIMENSIONI / DIMENSIONS								
a	120	120	150	150	200	200	230	230
b	60	60	60	60	60	60	60	60



# VULCANO\_EVO



Incasso LED integrato  
Corpo in TRP  
Diffusore in PC opale  
Riflettore cromato  
Driver incluso

Recessed fitting with built-in LED  
TRP body  
Opal PC diffuser  
Chromed reflector  
Driver included



CODICE / CODE	40571	40572	40573	40574	40575	40576	40577	40578
BEAM	80°	75°	65°	65°	80°	75°	65°	65°
COLORE / COLOUR	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K	4000K	4000K	4000K	4000K
LUMEN	1000	1400	1600	1900	1100	1500	1700	2000
CRI	>80	>80	>80	>80	>80	>80	>80	>80
LED	Everlight	Everlight	Everlight	Everlight	Everlight	Everlight	Everlight	Everlight
WATT	15W	20W	25W	30W	15W	20W	25W	30W
PF	>0,5	>0,5	>0,9	>0,9	>0,5	>0,5	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,25	0,35	0,47	0,47	0,25	0,35	0,47	0,47
DRIVER	140mA/90V	160mA/108V	160mA/135V	240mA/108V	140mA/90V	160mA/108V	160mA/135V	240mA/108V
FORO / HOLE	Ø125	Ø160	Ø200	Ø200	Ø125	Ø160	Ø200	Ø200
PCS	40	20	20	20	40	20	20	20
DIMENSIONI / DIMENSIONS								
a	150	190	230	230	150	190	230	230
b	81	91	101,5	101,5	81	91	101,5	101,5






# QUADRO 30



Incasso LED integrato  
Corpo in TRP  
Diffusore PC opale  
Driver integrato

Recessed fitting with built-in LED  
TRP body  
Opal PC diffuser  
Built-in driver

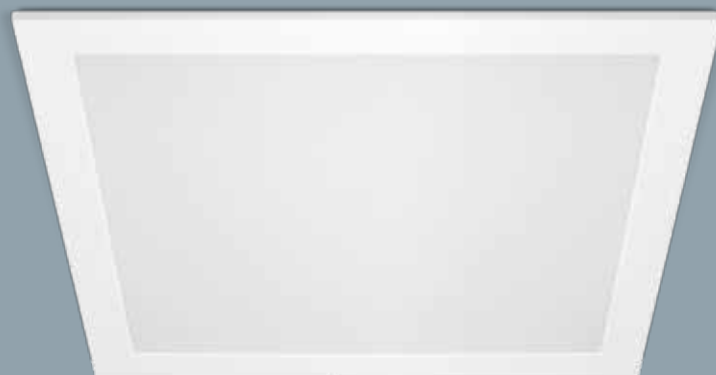


CODICE / CODE	40752	40753
BEAM	111°	111°
COLORE / COLOUR	bianco white	bianco white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	2400	2500
CRI	>80	>80
LED	Everlight	Everlight
WATT	30W	30W
PF	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,78	0,78
FORO / HOLE	288x288	288x288
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	300x300	300x300
b	65	65





Incasso LED integrato  
Corpo in pressofusione di alluminio verniciato  
Schermo in PC trasparente  
Driver incluso

Recessed fitting with built-in LED  
Painted die-cast aluminium body  
Transparent PC screen  
Driver included



<b>CODICE / CODE</b>	<b>40210</b>
<b>BEAM</b>	38°
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K
<b>LUMEN</b>	550
<b>CRI</b>	>80
<b>LED</b>	Refong COB
<b>WATT</b>	9W
<b>PF</b>	>0,5
<b>SUPPLY</b>	230V 50/60Hz
<b>DRIVER</b>	108mA/15-30V
<b>FORO / HOLE</b>	Ø75
<b>KG</b>	0,14
<b>PCS</b>	10
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	85
<b>b</b>	42



Incasso LED integrato  
Corpo in pressofusione di alluminio  
verniciato  
Schermo in PC trasparente  
Driver incluso

Recessed fitting with built-in LED  
Painted die-cast aluminium body  
Transparent PC screen  
Driver included



<b>CODICE / CODE</b>	<b>40211</b>
<b>BEAM</b>	25°
<b>COLORE / COLOUR</b>	bianco/white
<b>COLORE LUCE / COLOR T</b>	3000K
<b>LUMEN</b>	550
<b>CRI</b>	>80
<b>LED</b>	Refong COB
<b>WATT</b>	9W
<b>PF</b>	>0,5
<b>SUPPLY</b>	230V 50/60Hz
<b>DRIVER</b>	108mA/15-30V
<b>FORO / HOLE</b>	Ø75
<b>KG</b>	0,14
<b>PCS</b>	10
<b>DIMENSIONI / DIMENSIONS</b>	
<b>a</b>	85
<b>b</b>	65






luci per  
**UFFICIO**




Apparecchio da incasso/  
soffitto/sospensione LED integrato  
Corpo in alluminio verniciato  
Diffusore in PMMA  
Driver incluso

Recessed/ceiling/  
Suspension fitting with built-in LED  
Painted aluminium body  
PMMA diffuser  
Driver included

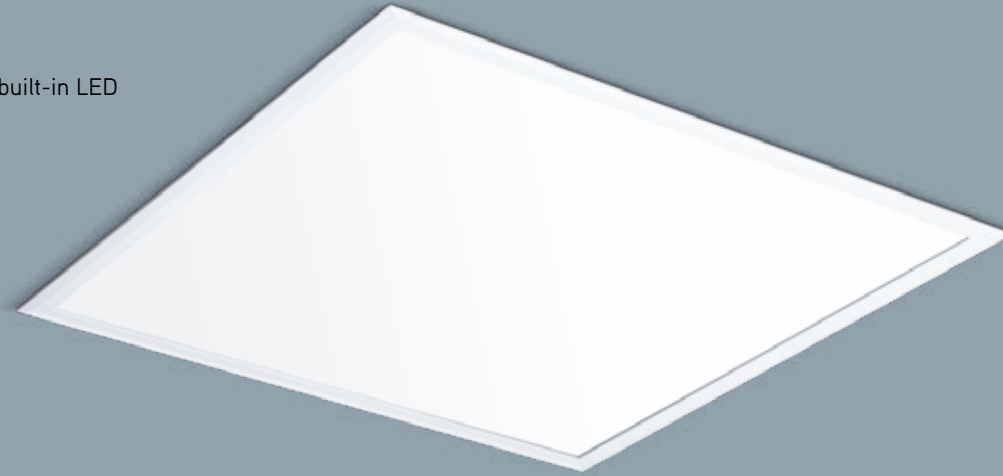

**42538**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
620x620



**42539**  
accessorio soffitto H mm. 43 /  
ceiling accessory H mm. 43



**11622/2**  
accessorio sospensione H mt. 2 /  
suspension accessory H mt. 2



CODICE / CODE	40222	40224	40223	40225
BEAM	120°	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	3000K	4000K	4000K
LUMEN	3200	4000	3400	4200
CRI	>80	>80	>80	>80
LED	SMD 4014	SMD 4014	SMD 4014	SMD 4014
WATT	36W	45W	36W	45W
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
DRIVER	900mA/25-36V	1100mA/27-42V	900mA/25-36V	1100mA/27-42V
KG	3,11	3,11	3,11	3,11
PCS	4	4	4	4
DIMENSIONI / DIMENSIONS				
a	595	595	595	595
b	9	9	9	9




**ACCESSORI**  
**ACCESSORIES**

**12549** Kit emergenza 1/h / Emergency unit 1/h  
**12550** Kit emergenza 3/h / Emergency unit 3/h  
**12835** Driver dimmerabile (0-10, 1-10V, Dali e Push) / Dimmable driver (0-10, 1-10V, Dali and Push)




Apparecchio da incasso/  
soffitto/sospensione LED integrato  
Corpo in alluminio verniciato  
Diffusore in PMMA  
Driver incluso

Recessed/ceiling/  
suspension fitting with built-in LED  
Painted aluminium body  
PMMA diffuser  
Driver included

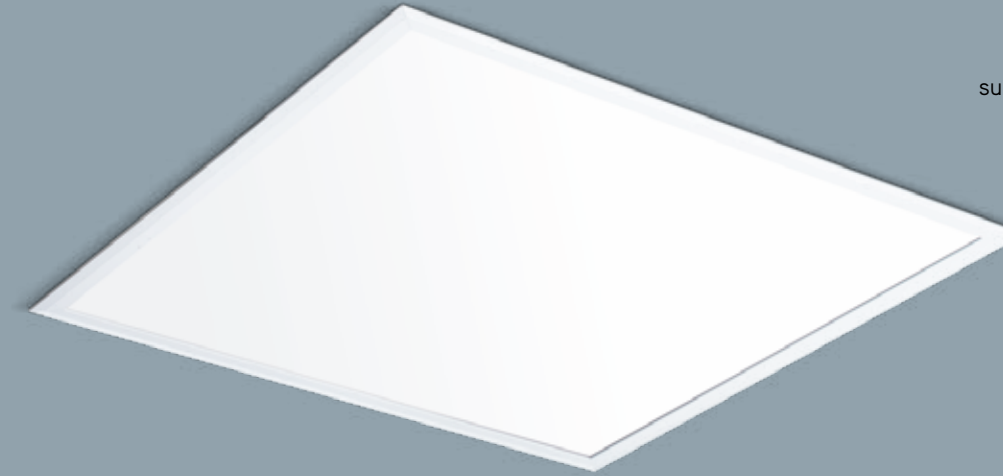

**42538**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
620x620



**42539**  
accessorio soffitto H mm. 43 /  
ceiling accessory H mm. 43



**11622/2**  
accessorio sospensione H mt. 2 /  
suspension accessory H mt. 2



CODICE / CODE	41000	41001
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	2900	3200
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
DRIVER	950mA/27-42V	950mA/27-42V
KG	2,30	2,30
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	9	9



**ACCESSORI**  
**ACCESSORIES**

**12549** Kit emergenza 1/h / Emergency unit 1/h  
**12550** Kit emergenza 3/h / Emergency unit 3/h  
**12835** Driver dimmerabile (0-10, 1-10V, Dali e Push) / Dimmable driver (0-10, 1-10V, Dali and Push)




Apparecchio da incasso/soffitto/  
sospensione LED integrato  
Corpo in alluminio verniciato  
Diffusore in PMMA con UGR<19  
Driver incluso

Recessed/ceiling/  
suspension fitting with built-in LED  
Painted aluminium body  
PMMA diffuser with UGR<19  
Driver included



**42538**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
620x620



**42539**  
accessorio soffitto H mm. 43 /  
ceiling accessory H mm. 43




**11622/2**  
accessorio sospensione H mt. 2 /  
suspension accessory H mt. 2



CODICE / CODE	41004	41005
BEAM	90°	90°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	2900	3200
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
DRIVER	950mA/27-42V	950mA/27-42V
KG	2,60	2,60
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	9	9

ACCESSORI	12549	Kit emergenza 1/h / Emergency unit 1/h
ACCESSORIES	12550	Kit emergenza 3/h / Emergency unit 3/h
	12835	Driver dimmerabile (0-10, 1-10V, Dali e Push) / Dimmable driver (0-10, 1-10V, Dali and Push)



Apparecchio da incasso/  
soffitto/sospensione LED integrato  
Corpo in alluminio verniciato  
Diffusore in PMMA  
Driver incluso


Recessed/ceiling/  
suspension fitting with built-in LED  
Painted aluminium body  
PMMA diffuser  
Driver included




**42542**  
cornice per montaggio cartongesso /  
frame for recessed mounting  
320x1220



**42540**  
accessorio soffitto H mm 43 /  
ceiling accessory H mm 43




**11622/3**  
accessorio sospensione H mt. 2 /  
suspension accessory H mt. 2

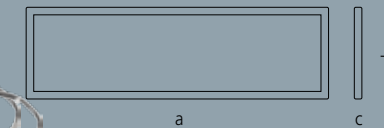

CODICE / CODE	41002	41003
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	2900	3200
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
DRIVER	950mA/27-42V	950mA/27-42V
KG	2,40	2,40
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	1195	1195
b	295	295
c	9	9

ACCESSORI	12549	Kit emergenza 1/h / Emergency unit 1/h
ACCESSORIES	12550	Kit emergenza 3/h / Emergency unit 3/h
	12835	Driver dimmerabile (0-10, 1-10V, Dali e Push) / Dimmable driver (0-10, 1-10V, Dali and Push)

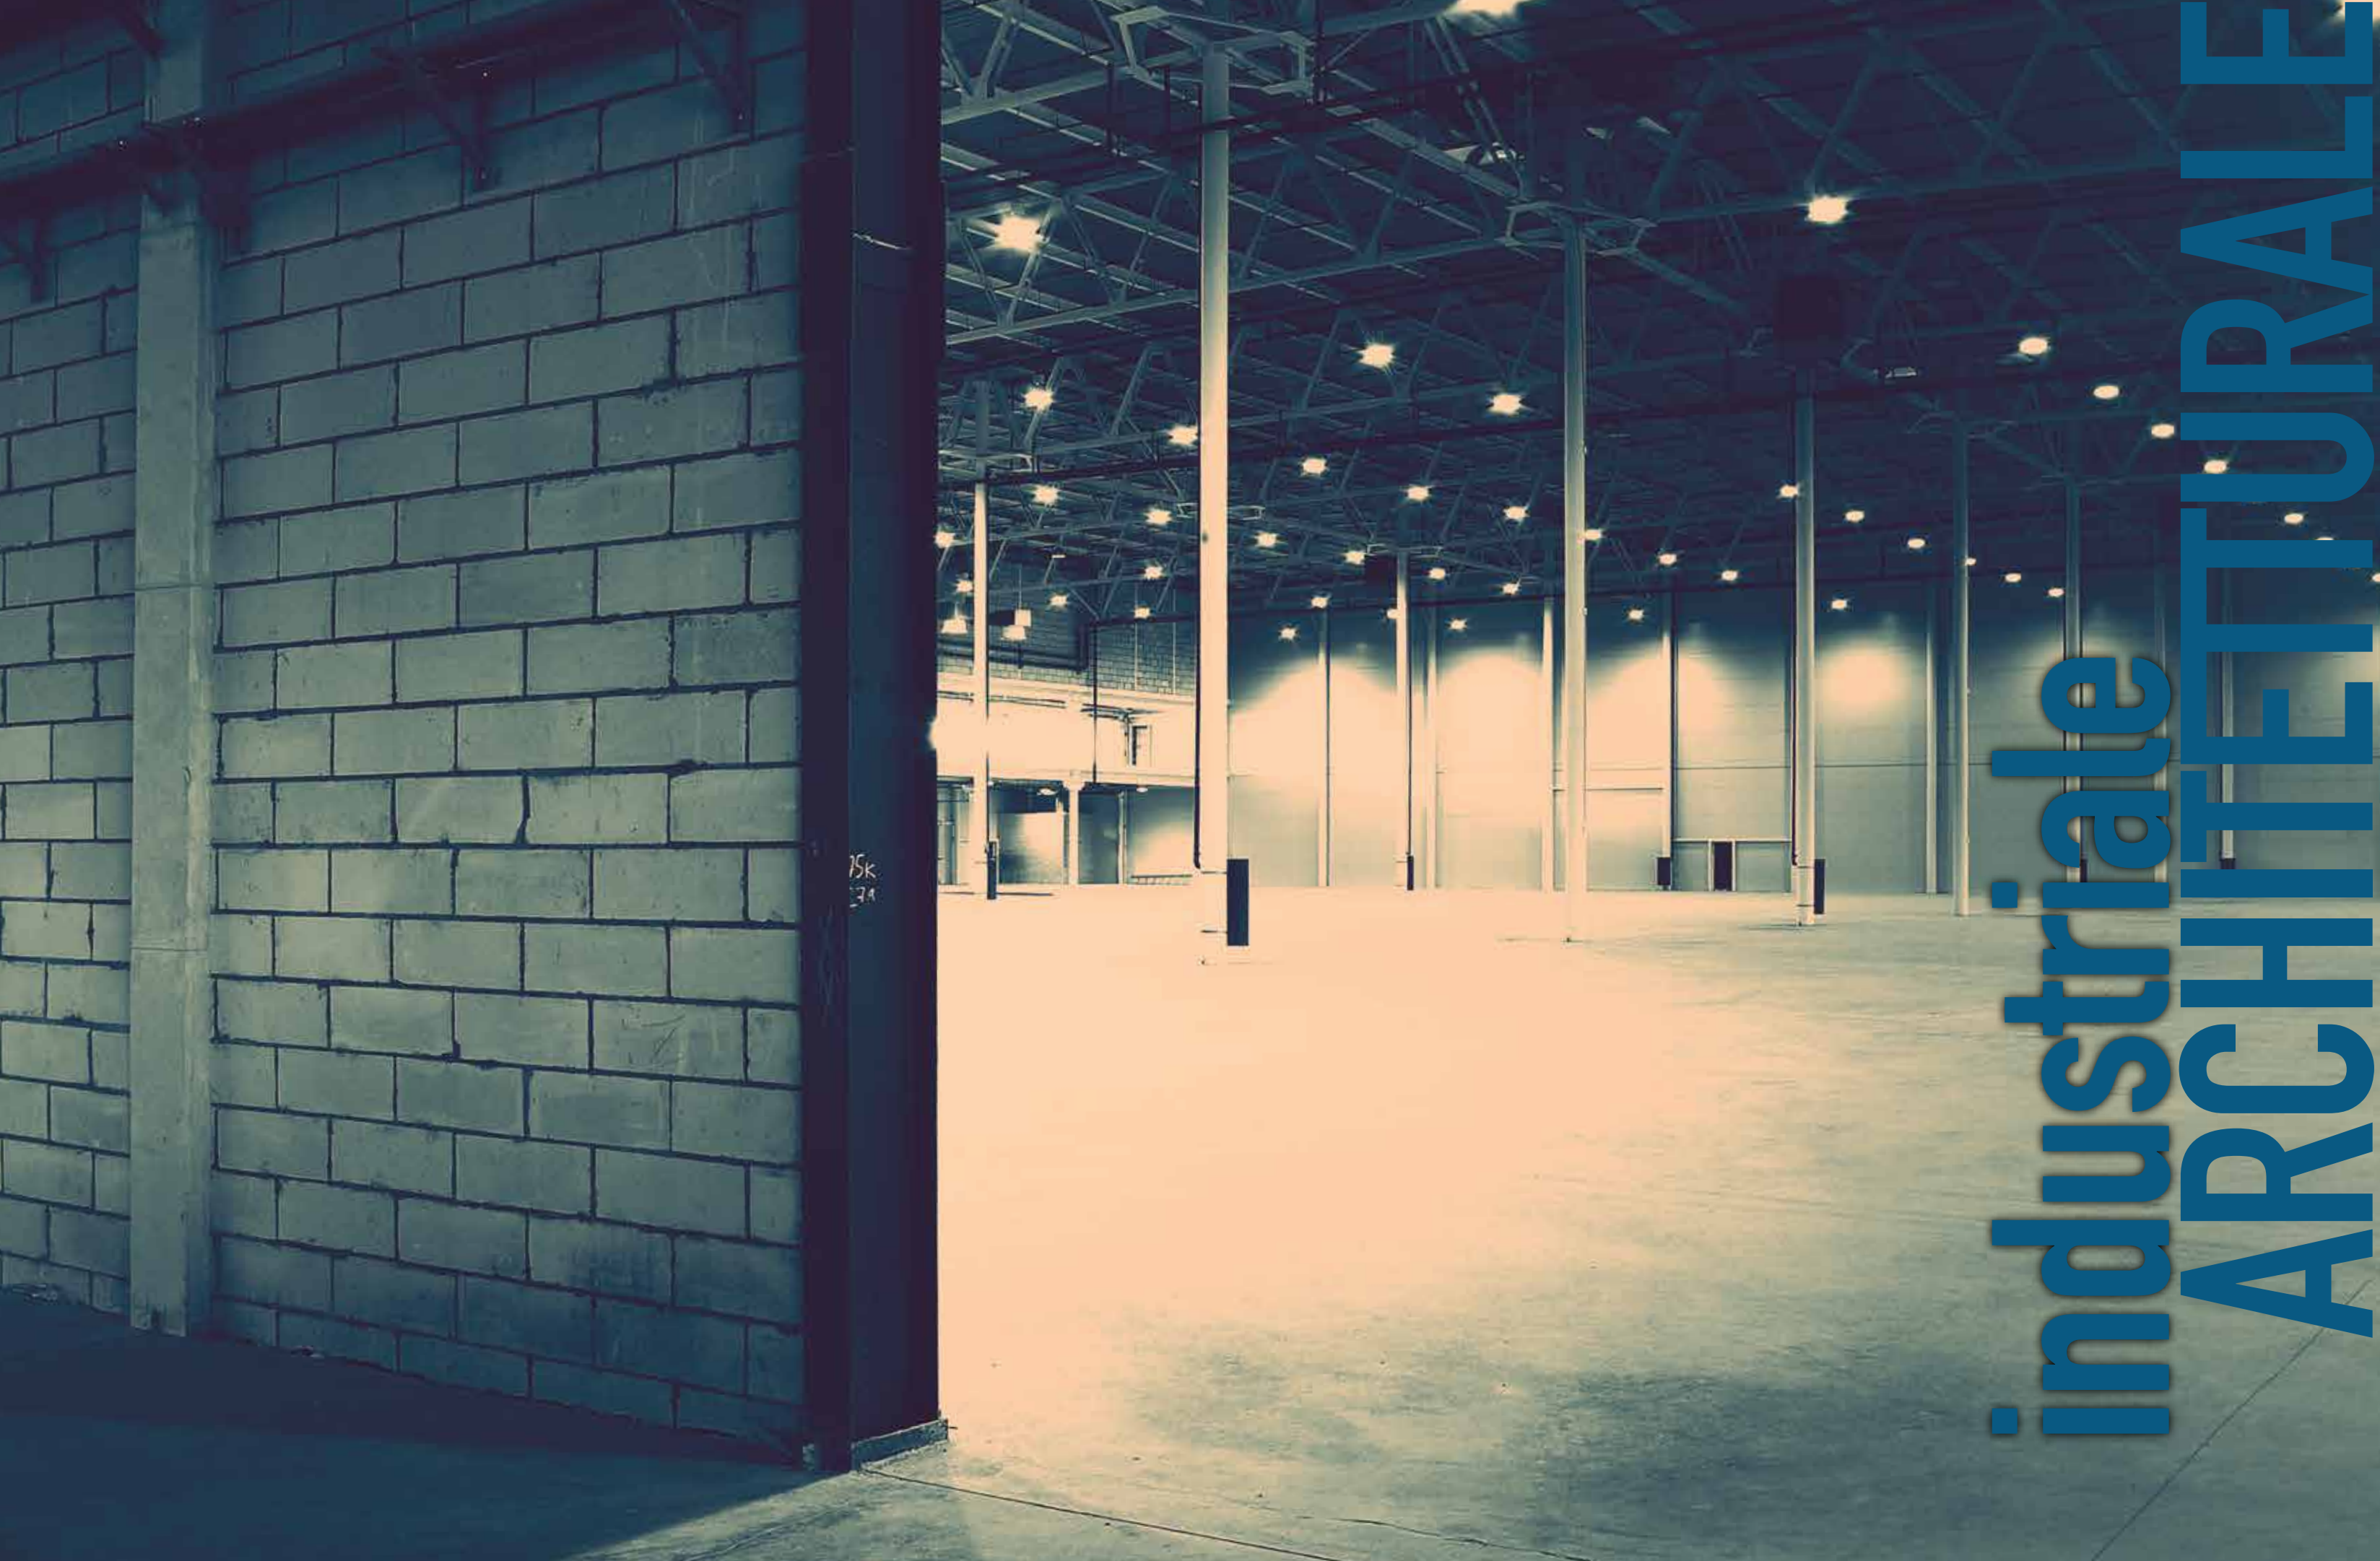

75k  
371




# industriale ARCHITETTURA

# PRO\_STAGNIALED



Corpo e diffusore in PC  
 Driver Osram incluso  
 LED LG  
 1200mm 12 clips di chiusura  
 1500mm 14 clips di chiusura


PC body and diffuser  
 Osram driver  
 LG LED  
 1200mm 12 latches  
 1500mm 14 latches

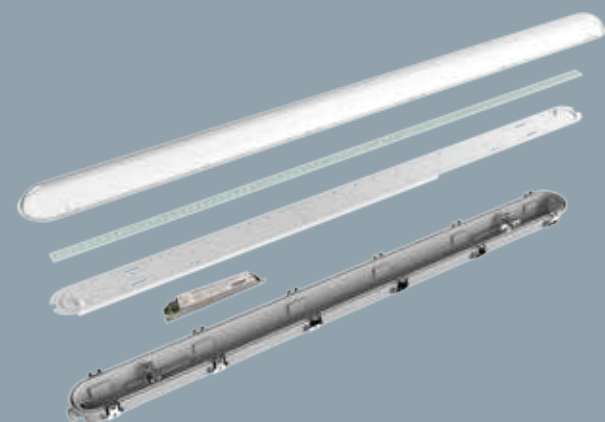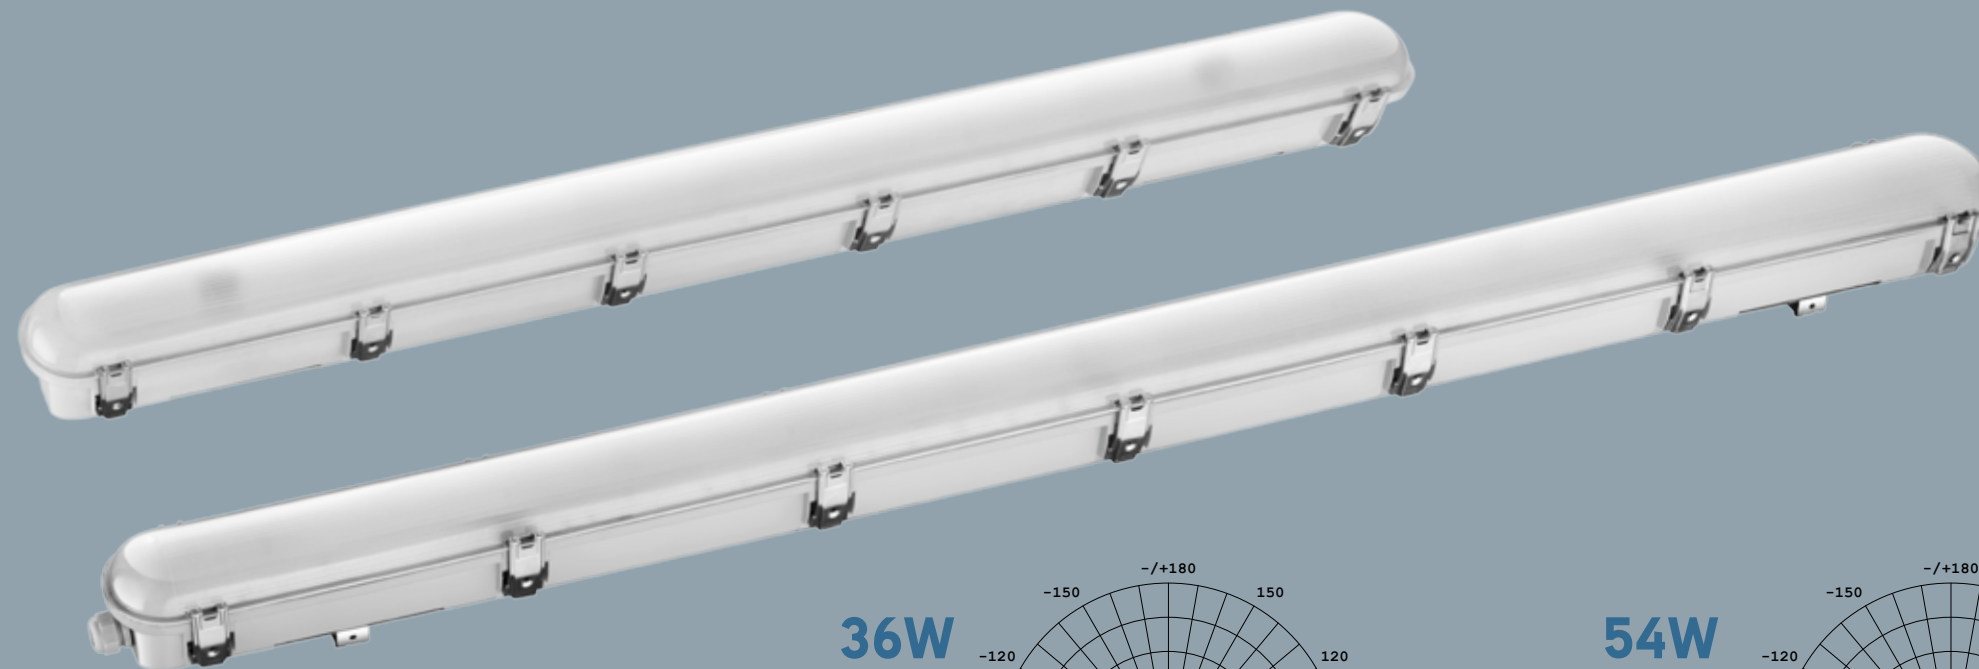




CODICE / CODE	41640	41641
BEAM	120°	120°
COLORE LUCE / COLOR T	4000K	4000K
LUMEN	3900	5900
CRI	>80	>80
LED	LG 2835	LG 2835
WATT	36W	54W
PF	>0,9	>0,9
SUPPLY	AC175-250V	AC175-250V
DRIVER	350mA 55-120V	350mA 90-170V
KG	1,7	2,1
PCS	6	6
<b>DIMENSIONI / DIMENSIONS</b>		
a	1220	1560
b	97	97
c	82	82

Versione con emergenza 4W 3/h Emergency version 4W 3/h		
	41644	41645
BEAM	120°	120°
COLORE LUCE / COLOR T	4000K	4000K
LUMEN	3900	5900
CRI	>80	>80
LED	LG 2835	LG 2835
WATT	36W	54W
PF	>0,9	>0,9
SUPPLY	AC175-250V	AC175-250V
DRIVER	350mA 55-120V	350mA 90-170V
KG	1,7	2,1
PCS	6	6
<b>DIMENSIONI / DIMENSIONS</b>		
a	1220	1560
b	97	97
c	82	82

36W

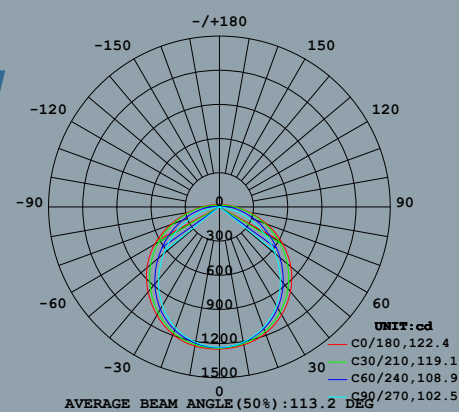

54W

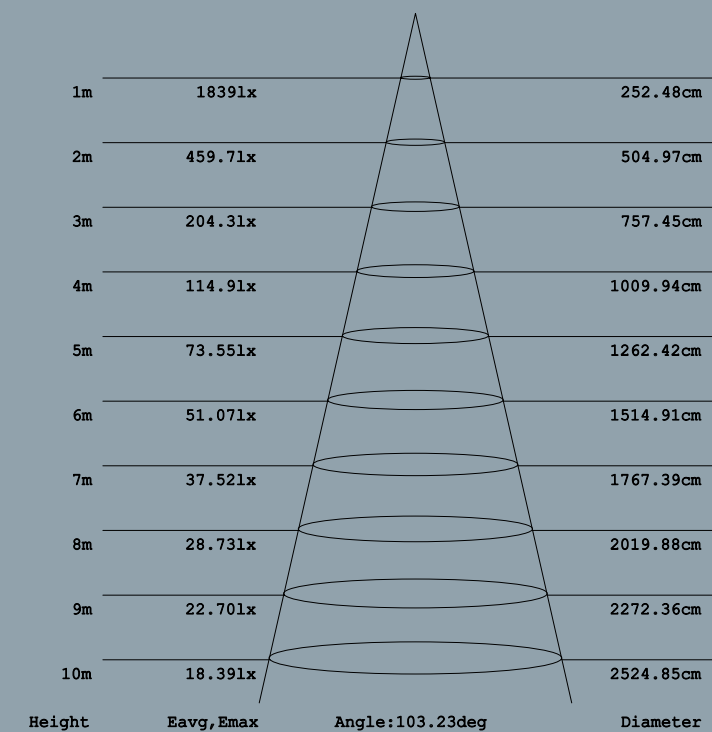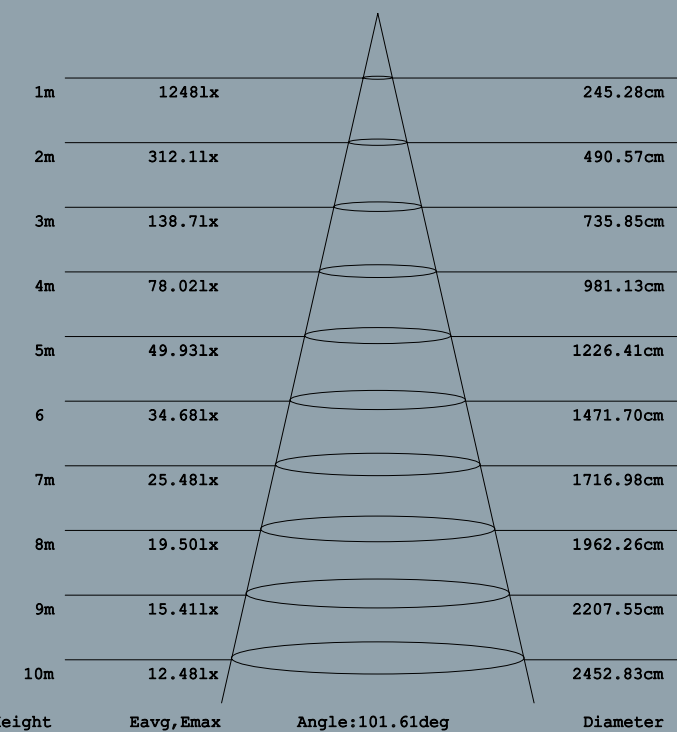
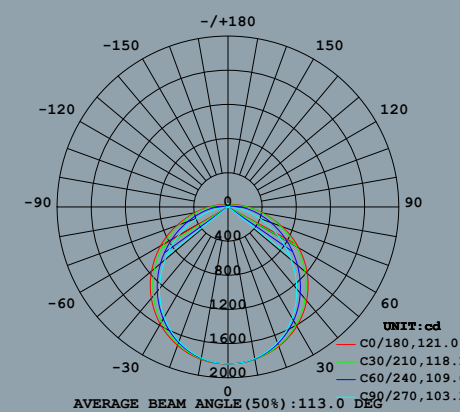


# STAGNA IP65



Corpo in ABS e diffusore in PS  
 Base struttura interna in metallo  
 600mm 4 clips di chiusura  
 1200mm 10 clips di chiusura  
 1500mm 12 clips di chiusura  
 Collegamento diretto tensione di rete  
 Solo per tubi LED 230V

ABS body + PS diffuser  
 Internal tray in plated iron  
 600mm 4 latches  
 1200mm 10 latches  
 1500mm 12 latches  
 Direct connection to mains voltage  
 Only for LED tubes 230V


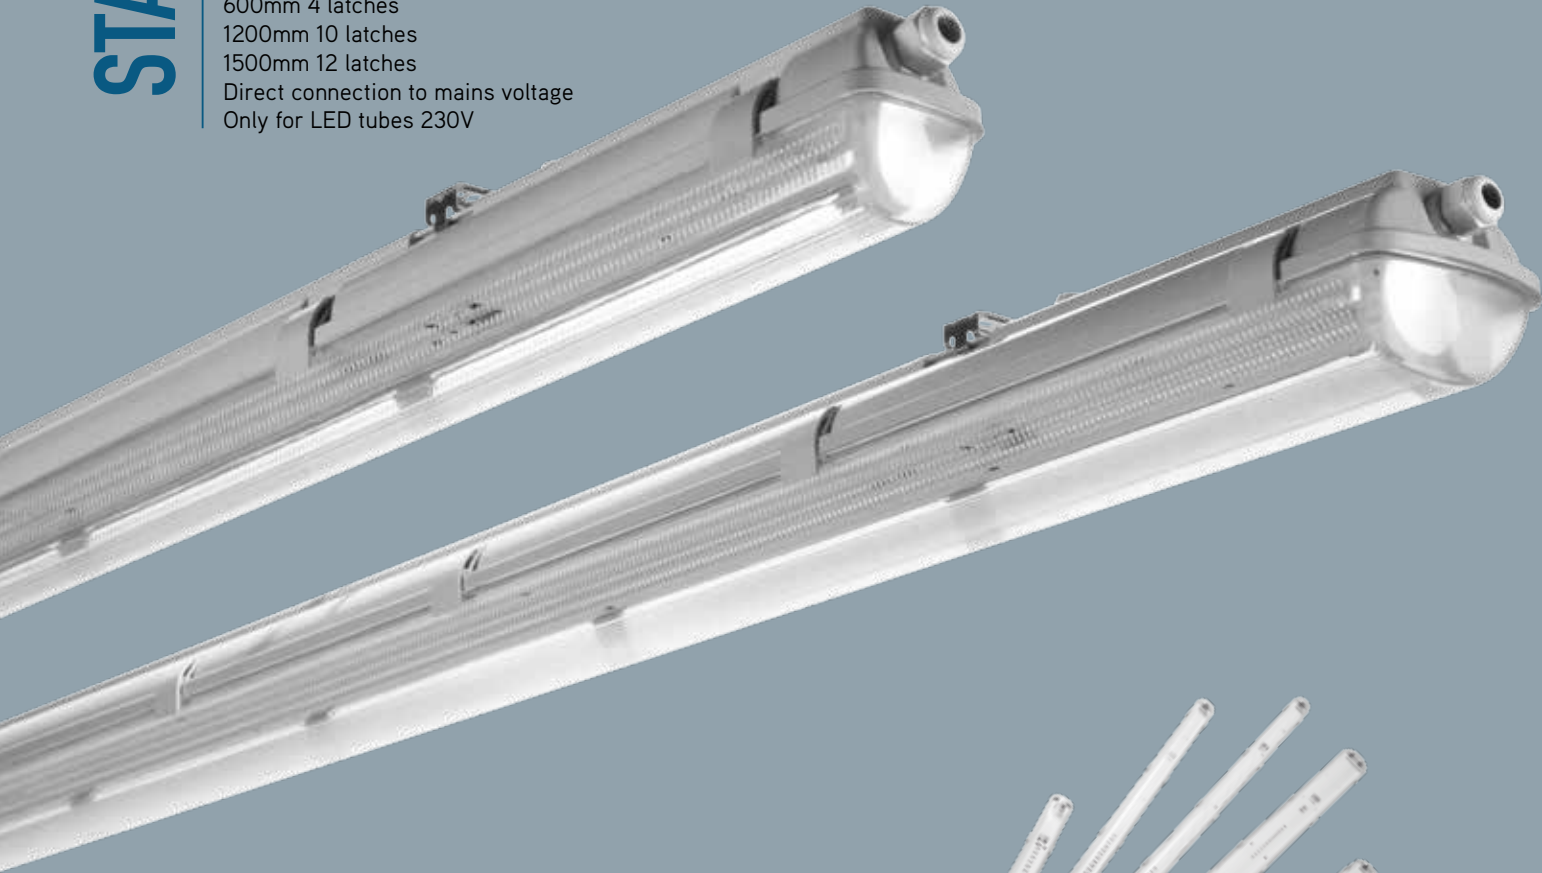


CODICE / CODE	41555	41556	41557	41558	41559	41560
	Mono	Mono	Mono	Bi	Bi	Bi
<b>KG</b>	0,53	0,90	1,19	0,67	1,22	1,57
<b>PCS</b>	12	12	8	8	4	4
<b>DIMENSIONI / DIMENSIONS</b>						
<b>a</b>	655	1263	1564	655	1263	1564
<b>b</b>	66	66	66	106	106	106
<b>c</b>	90	90	90	90	90	90




Tubi LED T8 per collegamento diretto tensione di rete  
 o per alimentatore elettromeccanico previa sostituzione starter (starter LED incluso con Tubo LED).  
 Non utilizzare in collegamenti in serie.  
 Per collegamento diretto alla tensione di rete verificare  
 con cura che i pins contrassegnati da "INPUT L-N"  
 vengano collegati alla morsettiera in entrata.

T8 LED tubes for direct mains voltage connection  
 or for electromagnetic ballast replacing the starter  
 (LED starter included with the LED tube).  
 Not suitable for series connection.  
 For direct connection to mains voltage please  
 make sure the pins labeled "INPUT L-N"  
 are connected to the terminal board.

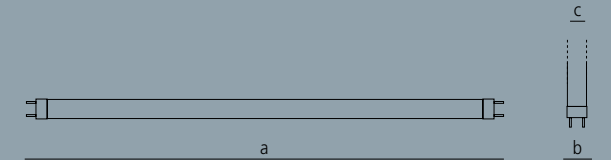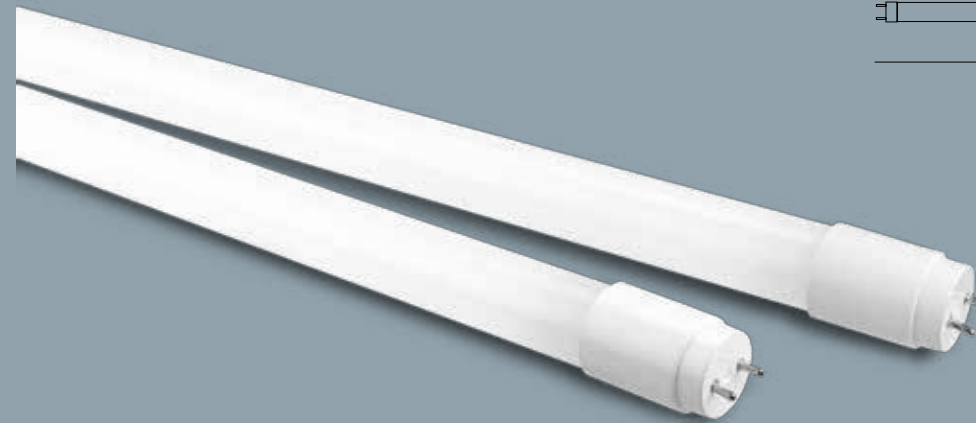

CODICE / CODE	21340	21341	21342	21343	21344	21345
<b>BEAM</b>	270°	270°	270°	270°	270°	270°
<b>COLORE LUCE / COLOR T</b>	4000K	4000K	4000K	6000K	6000K	6000K
<b>LUMEN</b>	900	1600	2400	945	1680	2520
<b>CRI</b>	>80	>80	>80	>80	>80	>80
<b>WATT</b>	9W	18W	25W	9W	18W	25W
<b>PF</b>	>0,9	>0,9	>0,9	>0,9	>0,9	>0,9
<b>SUPPLY</b>	AC175-250V	AC175-250V	AC175-250V	AC175-250V	AC175-250V	AC175-250V
<b>KG</b>	0,18	0,26	0,38	0,18	0,26	0,38
<b>DIMENSIONI / DIMENSIONS</b>						
<b>a</b>	600	1200	1500	600	1200	1500
<b>b</b>	28,7	28,7	28,7	28,7	28,7	28,7
<b>c</b>	26	26	26	26	26	26



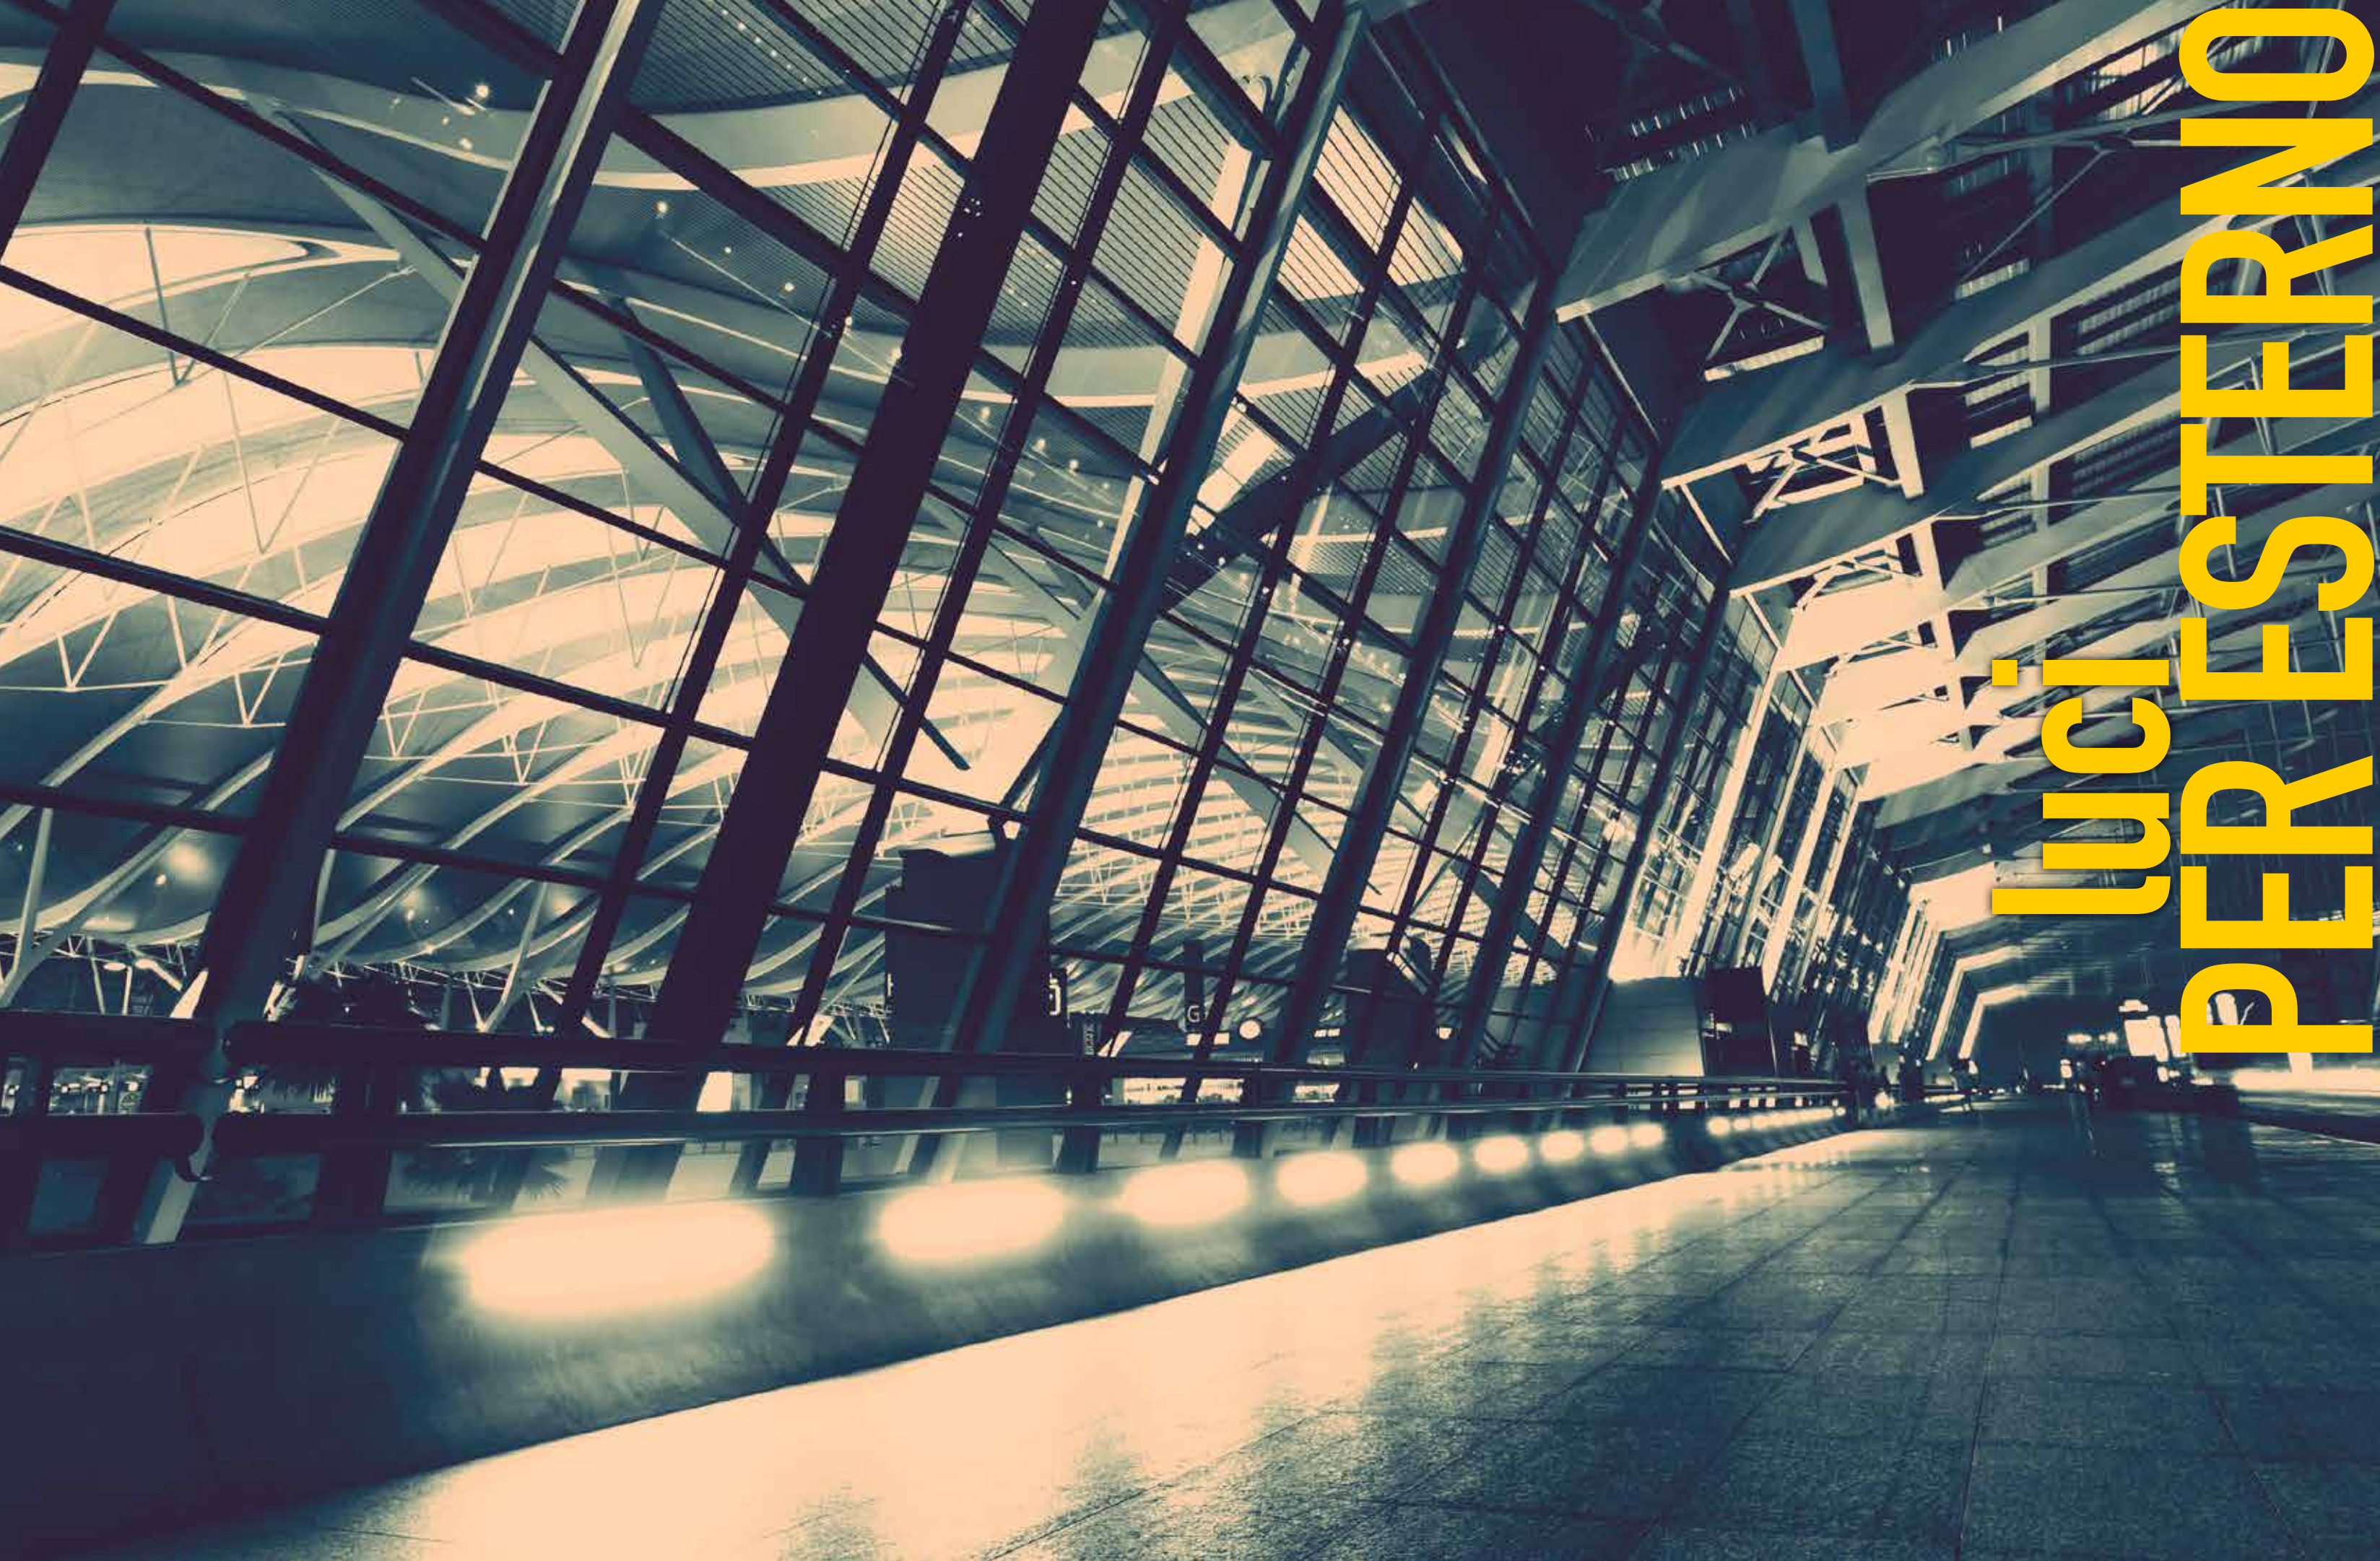


# LUCI PER ESTERNO



Proiettore LED integrato  
 Corpo in pressofusione di alluminio  
 Schermo in vetro temperato trasparente  
 Driver incluso

LED Floodlight  
 Die-cast aluminium body  
 Tempered transparent glass  
 Built-in driver









**DIMENSIONI / DIMENSIONS**

<b>a</b>	262	210	70
<b>b</b>	340	275	50
<b>c</b>	390	300	50





<b>CODICE / CODE</b>	<b>41170</b>	<b>41171</b>	<b>41172</b>
<b>BEAM</b>	85°x95°	85°x95°	85°x95°
<b>COLORE / COLOUR</b>	nero/black	nero/black	nero/black
<b>COLORE LUCE / COLOR T</b>	4000K	4000K	4000K
<b>LUMEN</b>	9500	14250	19000
<b>CRI</b>	>80	>80	>80
<b>LED</b>	BRIDGELUX SMD 2835	BRIDGELUX SMD 2835	BRIDGELUX SMD 2835
<b>WATT</b>	100W	150W	200W
<b>PF</b>	>0.9	>0.9	>0.9
<b>SUPPLY</b>	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
<b>KG</b>	2,4	4,5	5,7
<b>PCS</b>	6	4	4

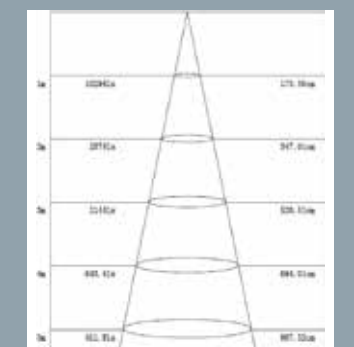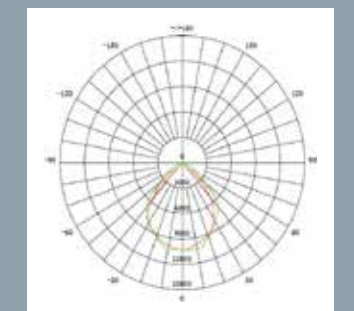



Proiettore LED integrato nero  
Corpo in pressofusione di alluminio  
Diffusore in vetro trasparente e driver integrato

Black LED Floodlight  
Die-cast aluminium body  
Transparent glass diffuser  
Built-in driver

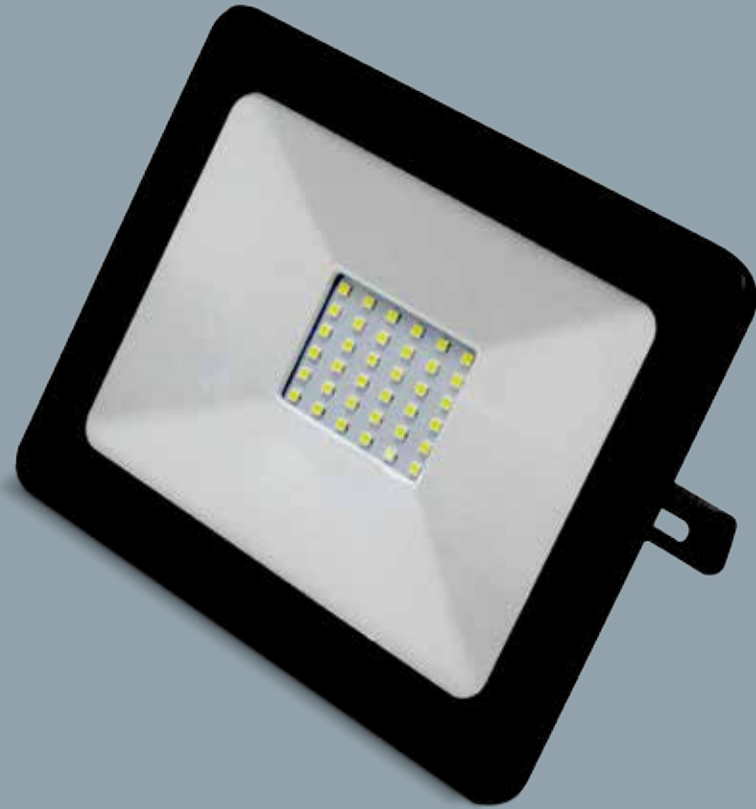

Lampo

CODICE / CODE	40552	40553	40554	40555	40568
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K	3000K
LUMEN	802	1605	2410	4050	7203
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,214	0,374	0,564	0,755	0,755
PCS	40	40	20	20	10
<b>DIMENSIONI / DIMENSIONS</b>					
a	115	147	190	220	300
b	80	103	132	155	200
c	16	18	18	19	20

CODICE / CODE	40556	40557	40558	40559	40569
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K	4000K
LUMEN	830	1700	2500	4130	7380
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,214	0,374	0,564	0,755	0,755
PCS	40	40	20	20	10
<b>DIMENSIONI / DIMENSIONS</b>					
a	115	147	190	220	300
b	80	103	132	155	200
c	16	18	18	19	20




CODICE / CODE	40560	40561	40562	40563	40570
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	6000K	6000K	6000K	6000K	6000K
LUMEN	850	1720	2700	4500	7470
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,214	0,374	0,564	0,755	0,755
PCS	40	40	20	20	10
<b>DIMENSIONI / DIMENSIONS</b>					
a	115	147	190	220	300
b	80	103	132	155	200
c	16	18	18	19	20

# LAMPO



Proiettore LED integrato bianco  
Corpo in pressofusione di alluminio  
Diffusore in vetro trasparente e driver integrato

White LED Floodlight  
Die-cast aluminium body  
Transparent glass diffuser  
Built-in driver

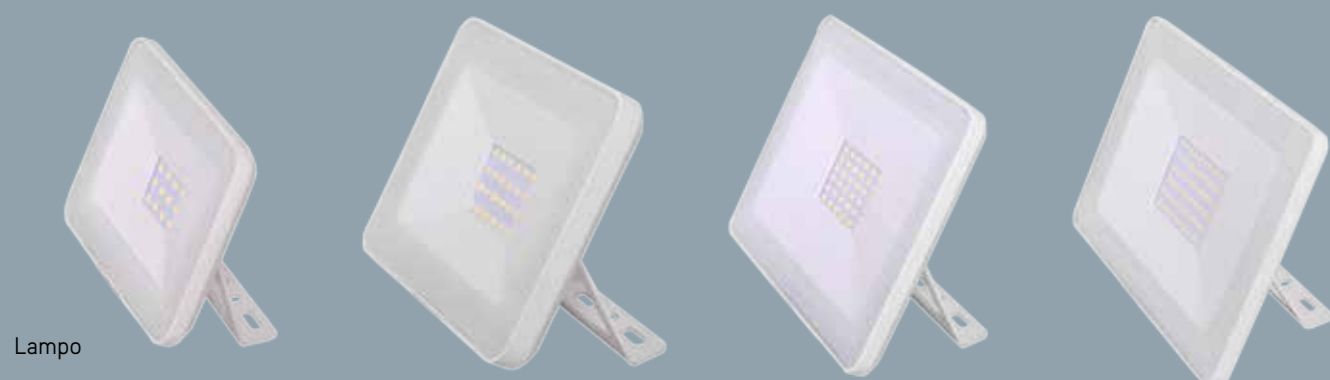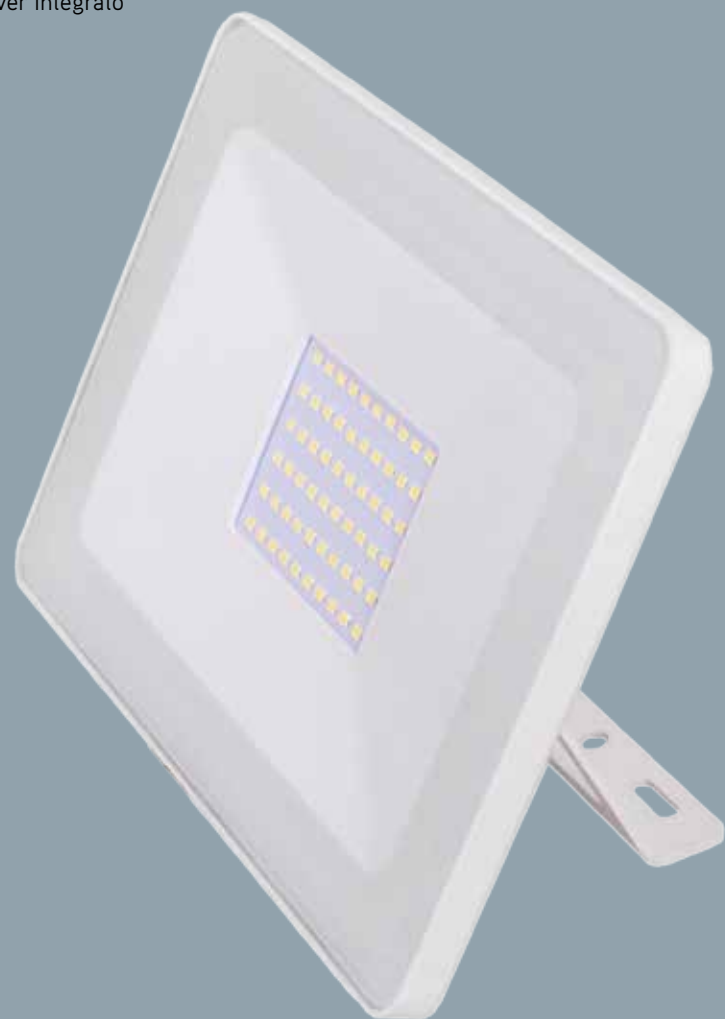

Lampo

CODICE / CODE	41149	41150	41151	41152	41161
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K	3000K
LUMEN	802	1605	2410	4050	7203
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,214	0,374	0,564	0,755	0,755
PCS	40	40	20	20	10
<b>DIMENSIONI / DIMENSIONS</b>					
a	115	147	190	220	300
b	80	103	132	155	200
c	16	18	18	19	20

CODICE / CODE	41153	41154	41155	41156	41162
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K	4000K
LUMEN	830	1700	2500	4130	7380
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,214	0,374	0,564	0,755	0,755
PCS	40	40	20	20	10
<b>DIMENSIONI / DIMENSIONS</b>					
a	115	147	190	220	300
b	80	103	132	155	200
c	16	18	18	19	20

CODICE / CODE	41157	41158	41159	41160	41163
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	6000K	6000K	6000K	6000K	6000K
LUMEN	850	1720	2700	4500	7470
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,214	0,374	0,564	0,755	0,755
PCS	40	40	20	20	10
<b>DIMENSIONI / DIMENSIONS</b>					
a	115	147	190	220	300
b	80	103	132	155	200
c	16	18	18	19	20




Proiettore LED integrato nero  
Corpo in pressofusione di alluminio  
Diffusore in PC e driver integrato

FOLGORE con sensore  
Distanza di rilevamento: entro 12m  
Angolo di rilevamento: ca. 90°  
Livello di illuminamento: 10 lux  
Tempo di accensione: 50± 20s

Black LED Floodlight  
Die-cast aluminium body  
PC diffuser  
Built-in driver

FOLGORE with sensor  
Detection distance: within 12m  
Detection angle: approx. 90°  
Lux level: 10 lux  
Delay time: 50± 20s

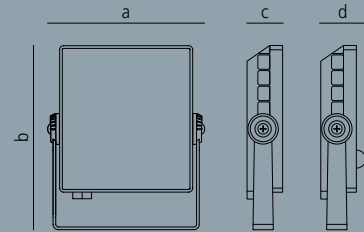

Folgore



CODICE / CODE	40540	40541	40542	40543	40544	40545	40546	40547
BEAM	110°	110°	110°	110°	110°	110°	110°	110°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K	4000K	4000K	4000K	4000K
LUMEN	780	1570	2360	3950	800	1600	2400	4000
CRI	>80	>80	>80	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	10W	20W	30W	50W
PF	0,5	0,9	0,9	0,9	0,5	0,9	0,9	0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,248	0,340	0,638	1,008	0,248	0,340	0,638	1,008
PCS	12	12	12	6	12	12	12	6
<b>DIMENSIONI / DIMENSIONS</b>								
a	117	138	167	222	117	138	167	222
b	138	159	220	301	138	159	220	301
c	27	28	36	38	27	28	36	38
d	-	-	-	-	-	-	-	-

CODICE / CODE	40564	40565	40566	40567	40548 SENSOR	40549 SENSOR	40550 SENSOR	40551 SENSOR
BEAM	110°	110°	110°	110°	110°	110°	110°	110°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	6000K	6000K	6000K	6000K	3000K	3000K	3000K	3000K
LUMEN	808	1616	2424	4040	780	1570	2360	3950
CRI	>80	>80	>80	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	10W	20W	30W	50W
PF	0,5	0,9	0,9	0,9	0,5	0,9	0,9	0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,248	0,340	0,638	1,008	0,268	0,356	0,650	1,052
PCS	12	12	12	6	12	12	12	6
<b>DIMENSIONI / DIMENSIONS</b>								
a	117	138	167	222	117	138	167	222
b	138	159	220	301	138	159	220	301
c	27	28	36	38	27	28	36	38
d	-	-	-	-	41	42	50	52

## LISTINO IVA ESCLUSA - ECO-FEE INCLUSO

Codice	€	Pag	Codice	€	Pag	Codice	€	Pag
11622/2	18,90	22-24	40551	69,00	41	41010	69,00	6
11622/3	30,90	25	40552	9,90	37	41011	69,00	6
12549	112,00	22-25	40553	15,00	37	41012	45,60	7
12550	169,00	22-25	40554	24,60	37	41013	45,60	7
12835	95,00	22-25	40555	33,60	37	41014	63,00	7
21340	8,54	31	40556	9,90	37	41015	63,00	7
21341	12,51	31	40557	15,00	37	41149	9,90	39
21342	15,56	31	40558	24,60	37	41150	15,00	39
21343	8,54	31	40559	33,60	37	41151	24,60	39
21344	12,51	31	40560	9,90	37	41152	33,60	39
21345	15,56	31	40561	15,00	37	41153	9,90	39
40210	32,44	18	40562	24,60	37	41154	15,00	39
40211	32,44	19	40563	33,60	37	41155	24,60	39
40222	112,00	22	40564	15,30	41	41156	33,60	39
40223	112,00	22	40565	24,90	41	41157	9,90	39
40224	118,00	22	40566	33,60	41	41158	15,00	39
40225	118,00	22	40567	55,92	41	41159	24,60	39
40303	22,14	8	40568	60,00	37	41160	33,60	39
40304	26,10	8	40569	60,00	37	41161	60,00	39
40305	22,14	9	40570	60,00	37	41162	60,00	39
40306	26,10	9	40571	21,60	14	41163	60,00	39
40511	18,90	12	40572	29,80	14	41170	150,00	35
40512	18,90	12	40573	37,00	14	41171	234,00	35
40513	29,88	12	40574	40,00	14	41172	288,00	35
40514	29,88	12	40575	21,60	14	41555	17,36	30
40515	36,30	12	40576	29,80	14	41556	23,56	30
40516	36,30	12	40577	37,00	14	41557	35,96	30
40517	38,94	12	40578	40,00	14	41558	21,70	30
40518	38,94	12	40752	43,30	16	41559	29,76	30
40540	15,30	41	40753	43,30	16	41560	39,65	30
40541	24,90	41	41000	79,70	23	41640	87,60	28
40542	33,60	41	41001	79,70	23	41641	110,40	28
40543	55,92	41	41002	82,00	25	41644	206,60	28
40544	15,30	41	41003	82,00	25	41645	229,40	28
40545	24,90	41	41004	94,50	24	42538	42,00	22-24
40546	33,60	41	41005	94,50	24	42539	22,80	22-24
40547	55,92	41	41006	33,00	6	42540	28,80	25
40548	26,10	41	41007	33,00	6	42542	54,00	25
40549	36,60	41	41008	46,80	6			
40550	45,72	41	41009	46,80	6			

I nostri prodotti sono soggetti a continui sviluppi e cambiamenti. Ci riserviamo il diritto di mutare le specifiche o eliminare alcuni modelli senza preavviso. I colori stampati in questo catalogo non possono produrre fedelmente le tinte dei nostri prodotti. Pertanto sono da considerarsi puramente indicativi. È vietata la riproduzione, anche parziale, di questo catalogo in qualsiasi forma e su qualsiasi supporto senza autorizzazione.

Our products are subjected to continuous changes and developments. We reserve the right to modify the specification or eliminate some models without notice. The colours printed in this catalogue may not reproduce faithfully the hues of the products and have to be considered merely indicative. Total or partial reproduction of this catalogue in any form is not allowed without our prior consent.



[marinocristal.com](http://marinocristal.com)



**MARINOCRISTAL**

Marino Cristal S.p.A.

Via Guardia del Consiglio 29

47899 Serravalle - Rep. di San Marino

Tel. (+378) 0549-901188

Fax (+378) 0549-900612

[www.marinocristal.com](http://www.marinocristal.com)

email: [marinocristal@marinocristal.com](mailto:marinocristal@marinocristal.com)